


Data according to UL508

Main Contacts (cULus)		Type	K3-50	K3-62	K3-74
Rated operational current "General Use"		A	110	120	130
Motor DOL 3-phase at 60Hz					
Rated operational power	110-120V	hp	10	10	10
	200V	hp	15	20	25
	220-240V	hp	20	25	30
	277V	hp	20	25	30
	380-415V	hp	25	30	40
440-480V	hp	30	40	50	
550-600V	hp	40	50	50	
Motor DOL 1-phase at 60Hz					
Rated operational power of AC motors at 60Hz (1ph)	110-120V	hp	3	5	7½
	200V	hp	7½	10	15
	220-240V	hp	10	15	15
	277V	hp	10	15	15
	380-415V	hp	15	20	20
440-480V	hp	20	25	25	
550-600V	hp	25	30	30	
Motor DOL 3-phase according to ASME A17.5					
Rated operational current		600V A	27	37	-
Rated operational power of 3-phase motors for elevators (500.000 operations)	110-120V	hp	3	5	-
	200V	hp	7½	10	-
	220-240V	hp	7½	10	-
	440-480V	hp	20	25	-
550-600V	hp	25	30	-	
Rated current 2 series contacts		600V A	44	52	66
Fuse Class RK5 / Short-circuit current		A/kA	200/5	250/5	300/5
Fuse Class T / Short-circuit current		A/kA	75/100	175/100	175/100
Rated voltage		V	600	600	600
Auxiliary Contacts (cULus)			-	-	-

Contact life

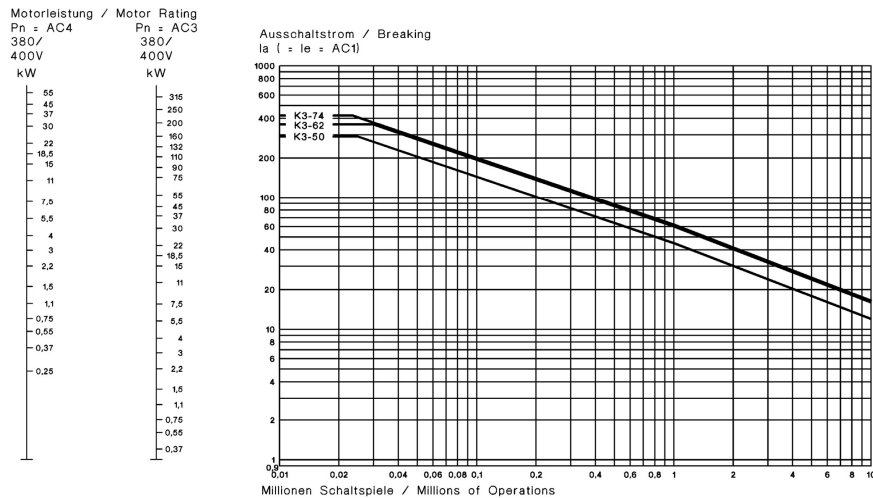

Mounting positions of contactors

K3-50A00.. to K3-74A00..

